



SCG SKIM COAT
CEMENT

What is SKIM COAT polished cement?


SKIM COAT is a self-drying, trowel applied Finish for walls and ceilings. Formulated with a blend of Portland cement and special polymers, the material exhibits excellent properties and hardens quickly. It has excellent adhesion over a wide variety of porous surfaces, including concrete, and all types of masonry surfaces. **SKIM COAT** can be used to produce a high-end and contemporary creative cement wall surface in areas such as retail stores, shops, hotels, cafés, vestibules, and residential apartments.

Area per Bag (25 kg.)



- Thickness 1 mm. 20.0 m²
- Thickness 2 mm. 10.0 m²
- Thickness 3 mm. 6.67 m²

SCG Skim Coat is appropriate for thin plastering of 1-3 millimeters in thickness on concrete surface, both indoors and outdoors. The product incorporates special agents to prevent air bubbles and minor cracks on the surface and can be used to correct problems on the previously-plastered surface. Skim Coat is highly popular and widely accepted in Europe and America.

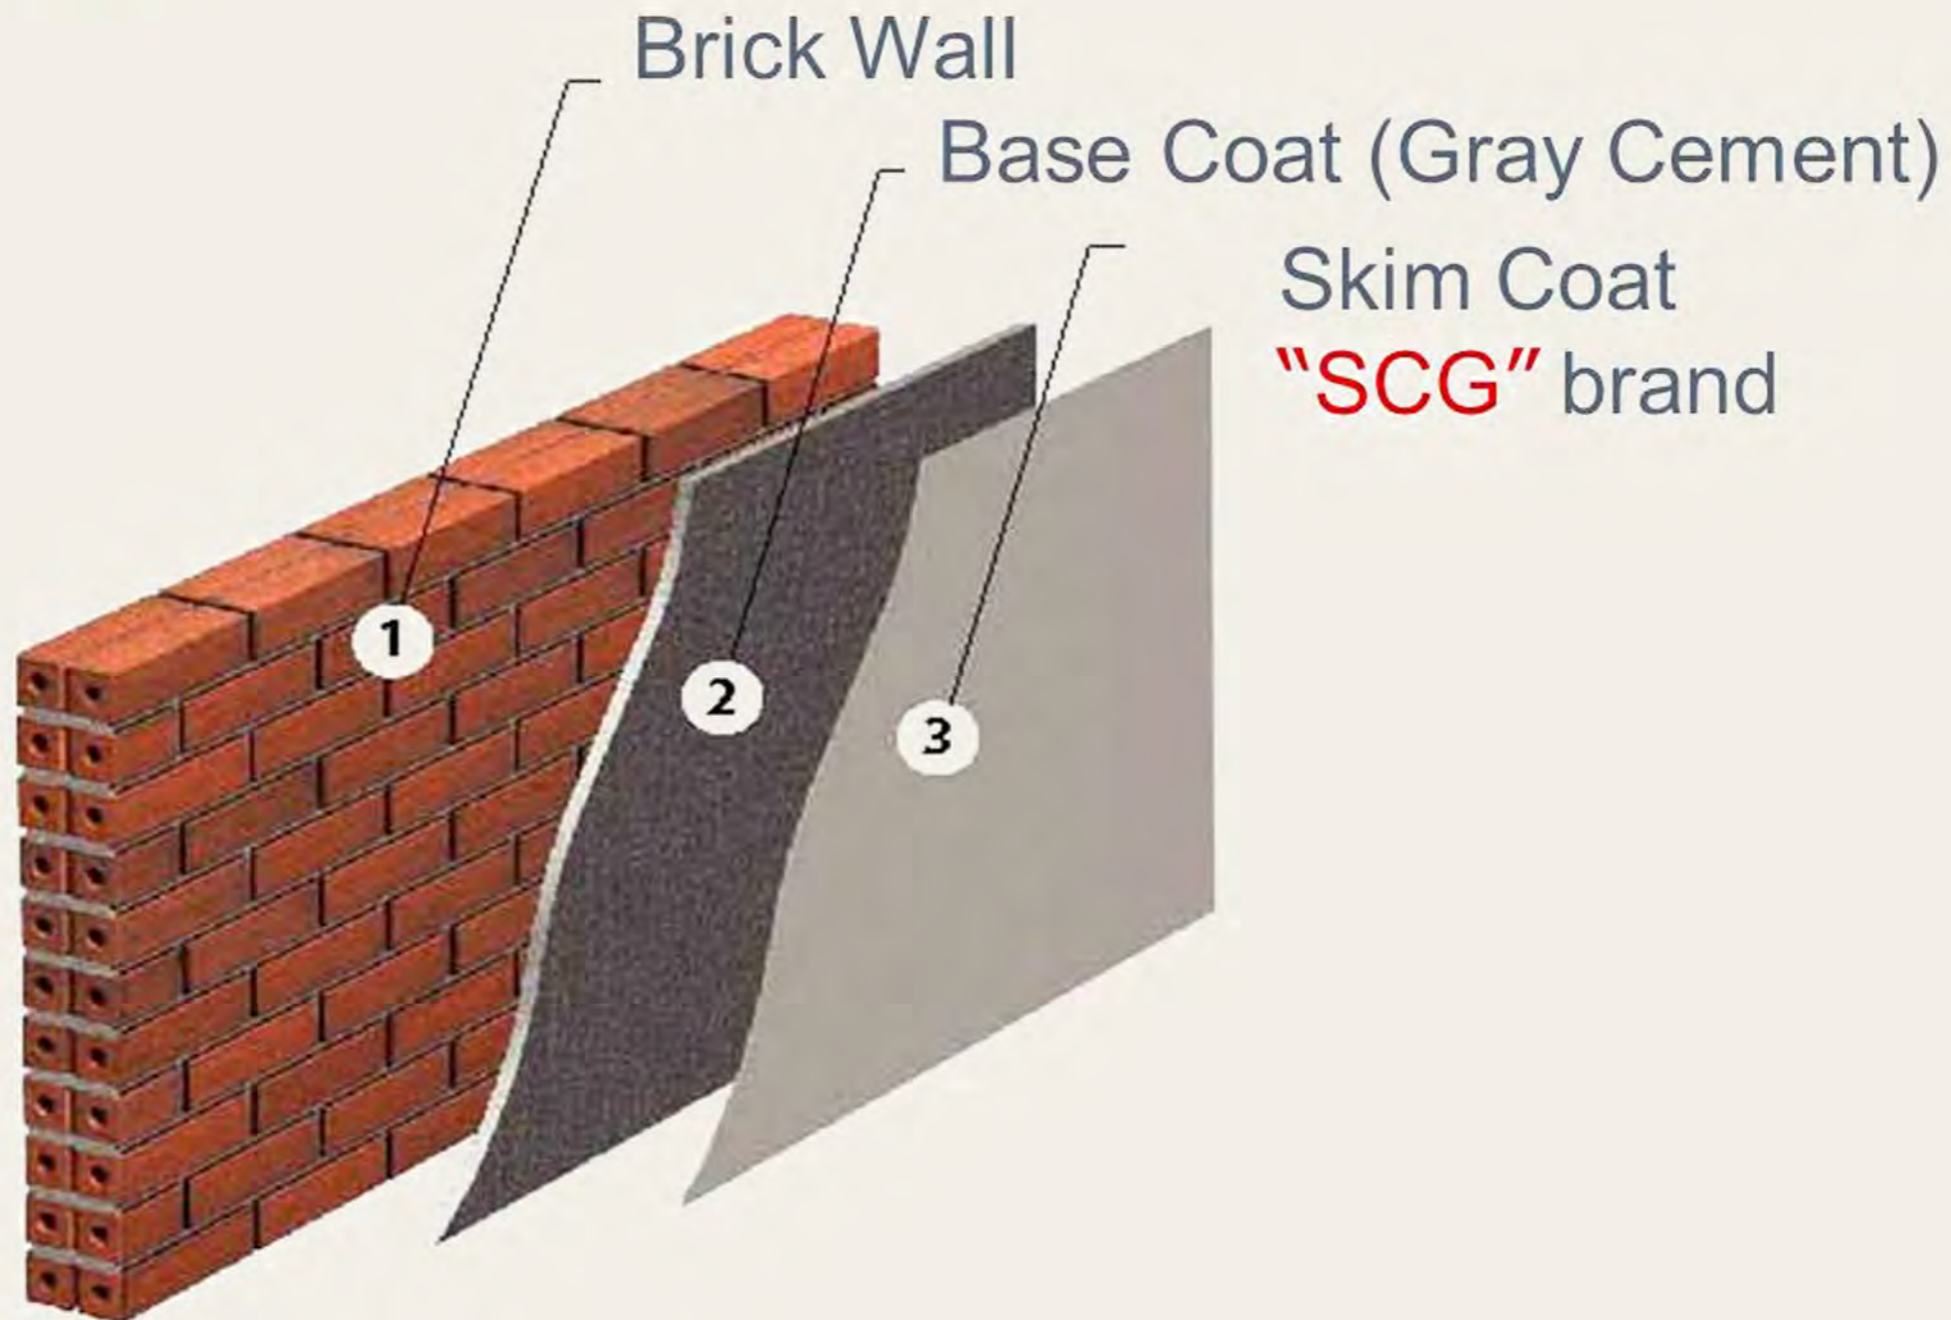


Surface to be applied must be structurally sound, clean and free from any foreign materials such as oil stains, old coating, dust, grease that may affect adhesion of skim coat.

Color Skim Coat



Color Skim Coat is another plastering cement innovation from SCG Brand that reflects individual styles with 16 colors 6 shades to choose from.

The product allows for smooth plastering of 1-3 millimeters thickness on concrete surface.

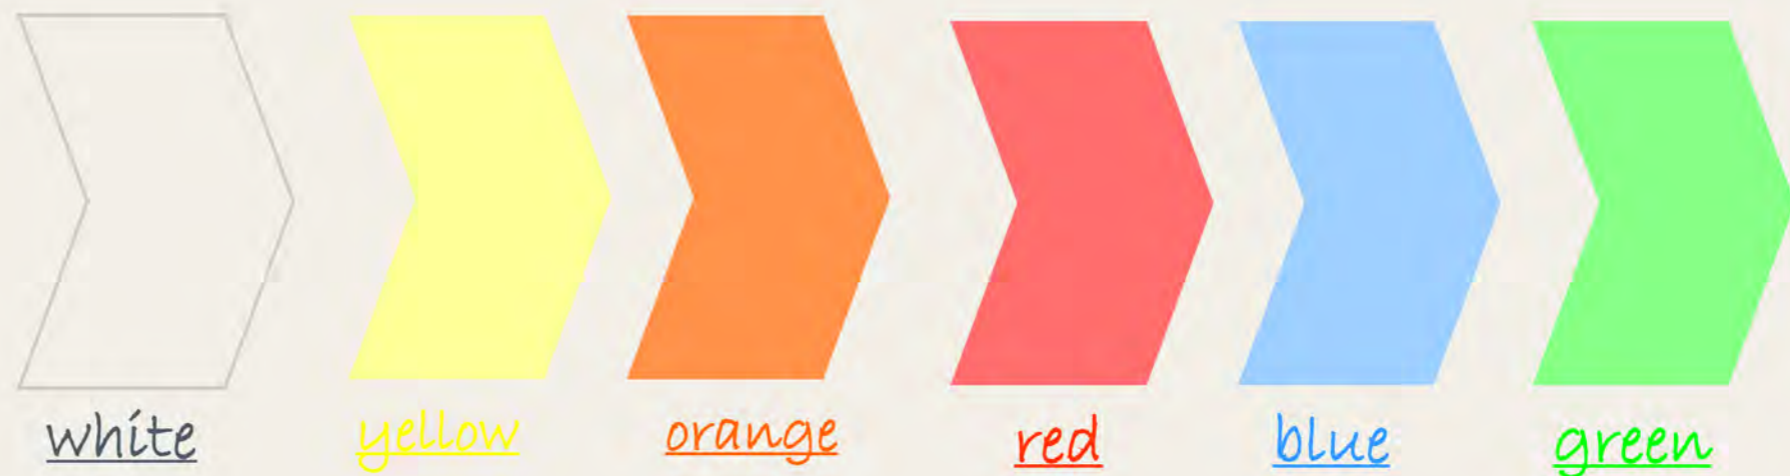

Color Render

- Color Render is another plastering cement innovation that reflects individual styles.
- The product is strong and long lasting and the thickness can be chosen between 1 and 3 millimeters.
- The range of colors varies with 6 shades, 16 colors and 3 grain sizes .



Decorative plaster



Colors

• White



• Yellow



• Orange



• Red



• Blue




• Green



grain size



Decorative plaster

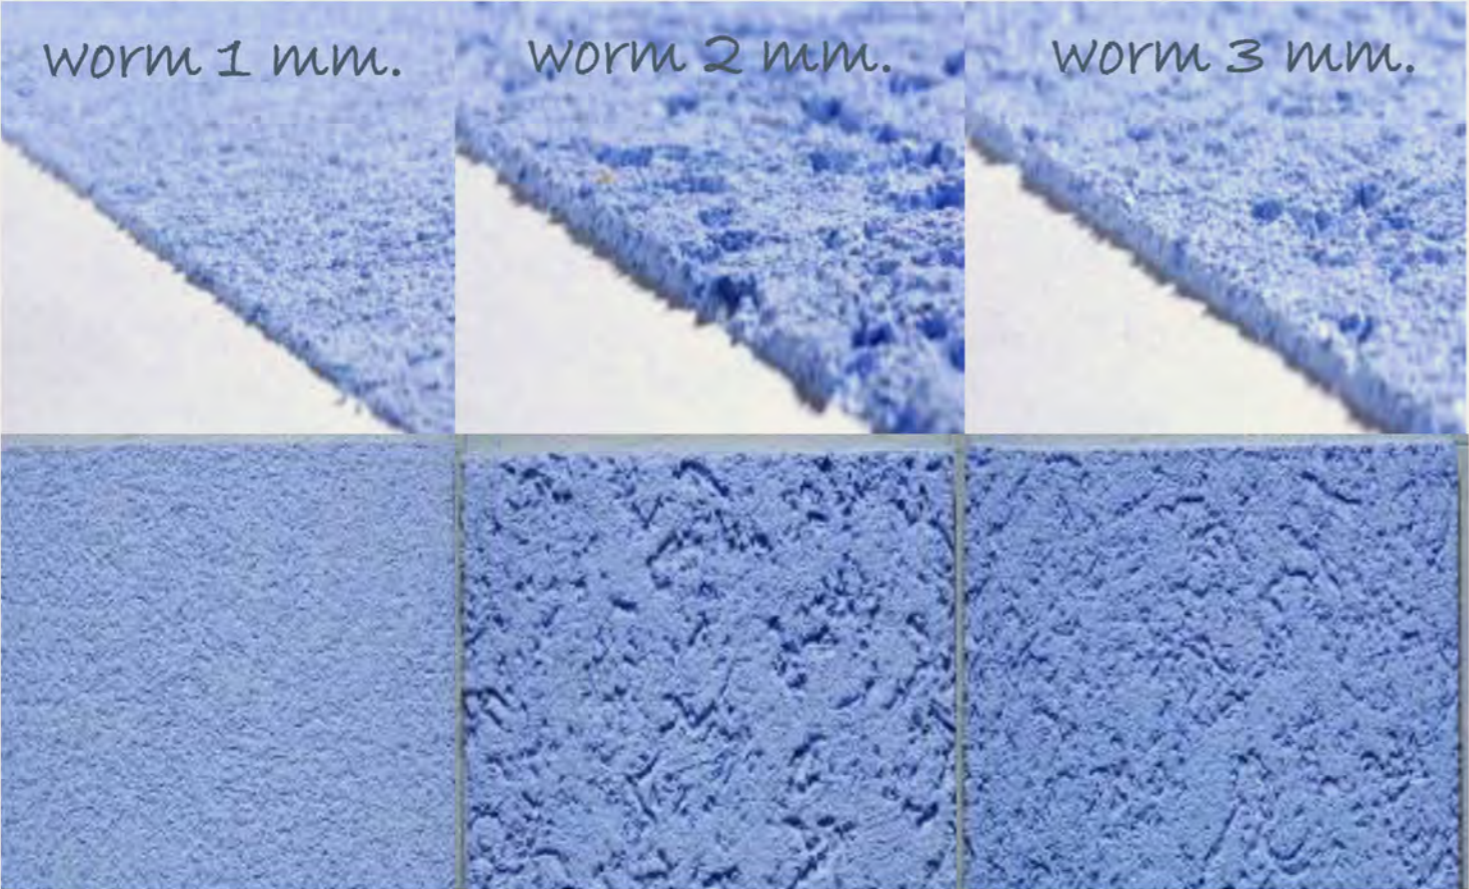


Texture




- Worm

Texture

- Scratch

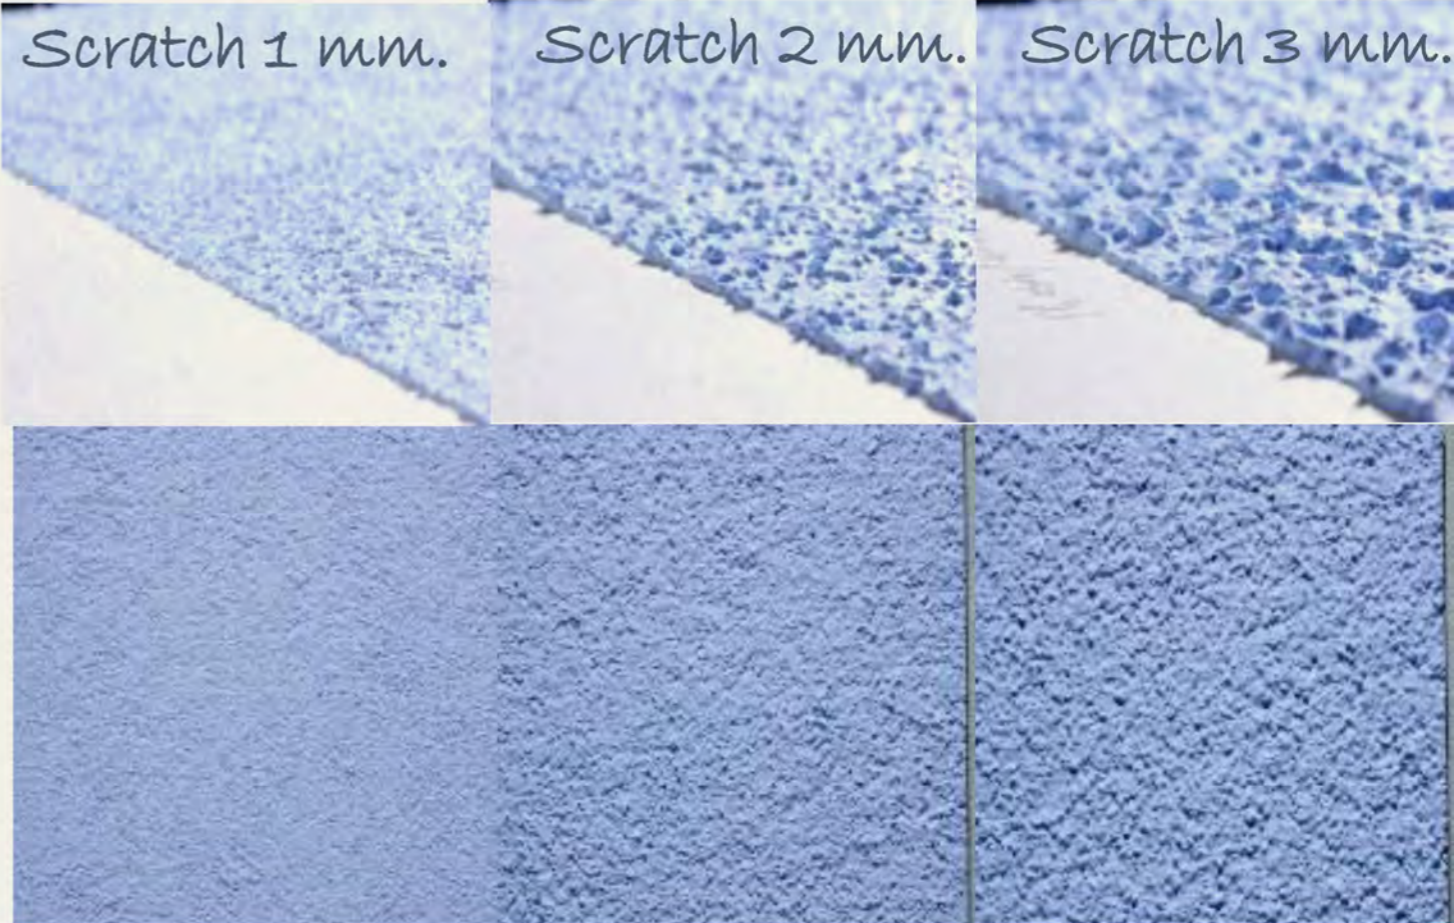

Color render

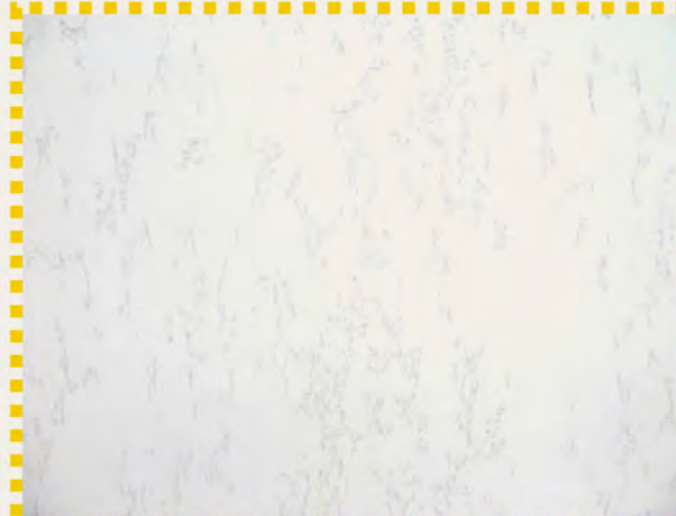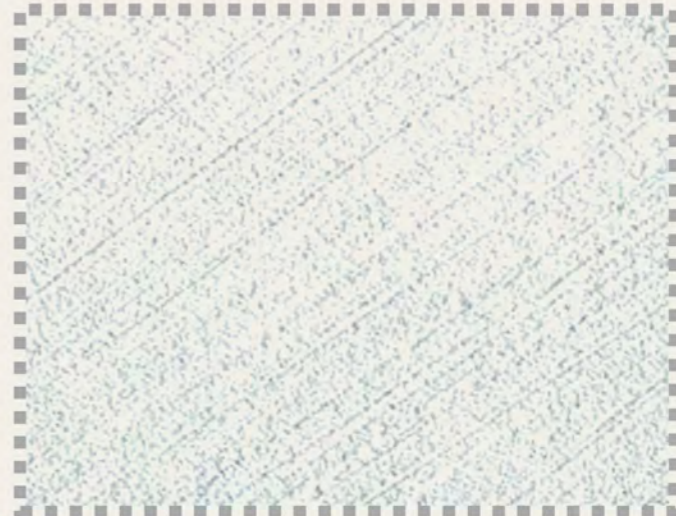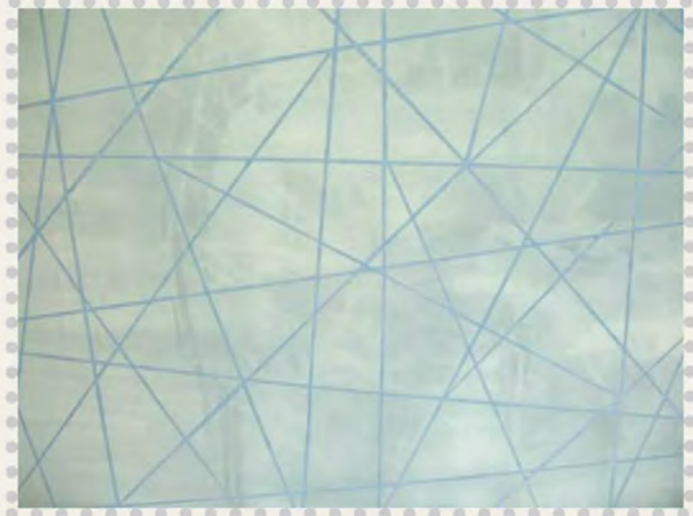




WH01




GE01



GE02

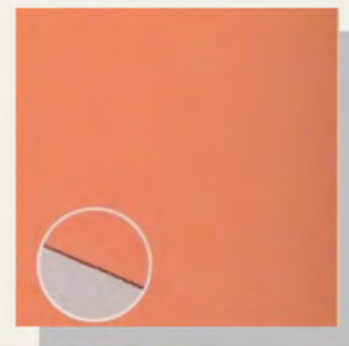


RE01

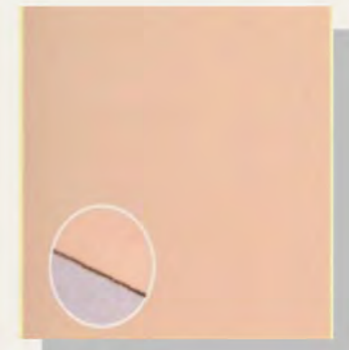


OR01



OR02

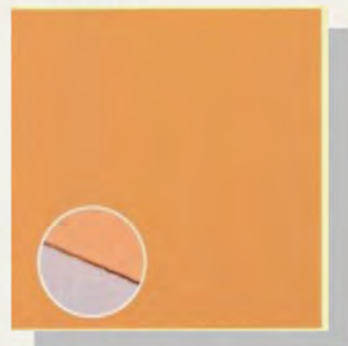


OR03

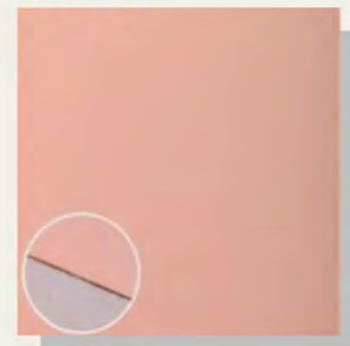


OR04




YE 01

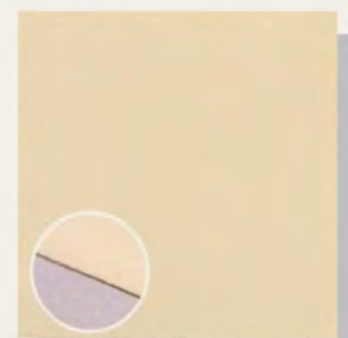

YE 02

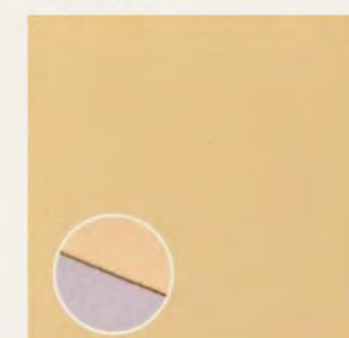


YE 03

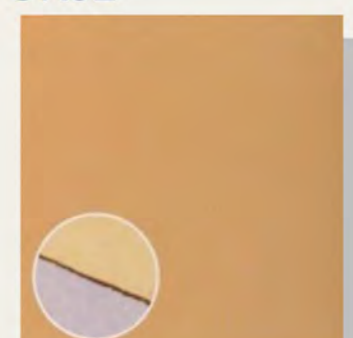

YE 04




BL01

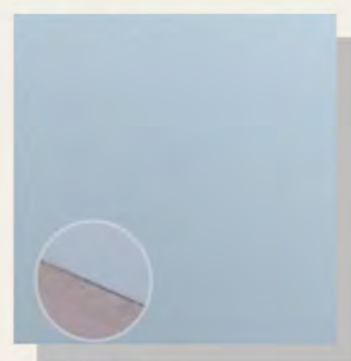

BL02



BL03

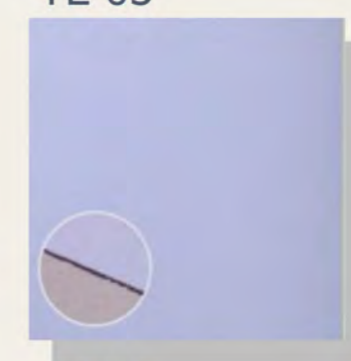

BL04



For Bathrooms







Bedrooms







Living Areas










Feature spaces

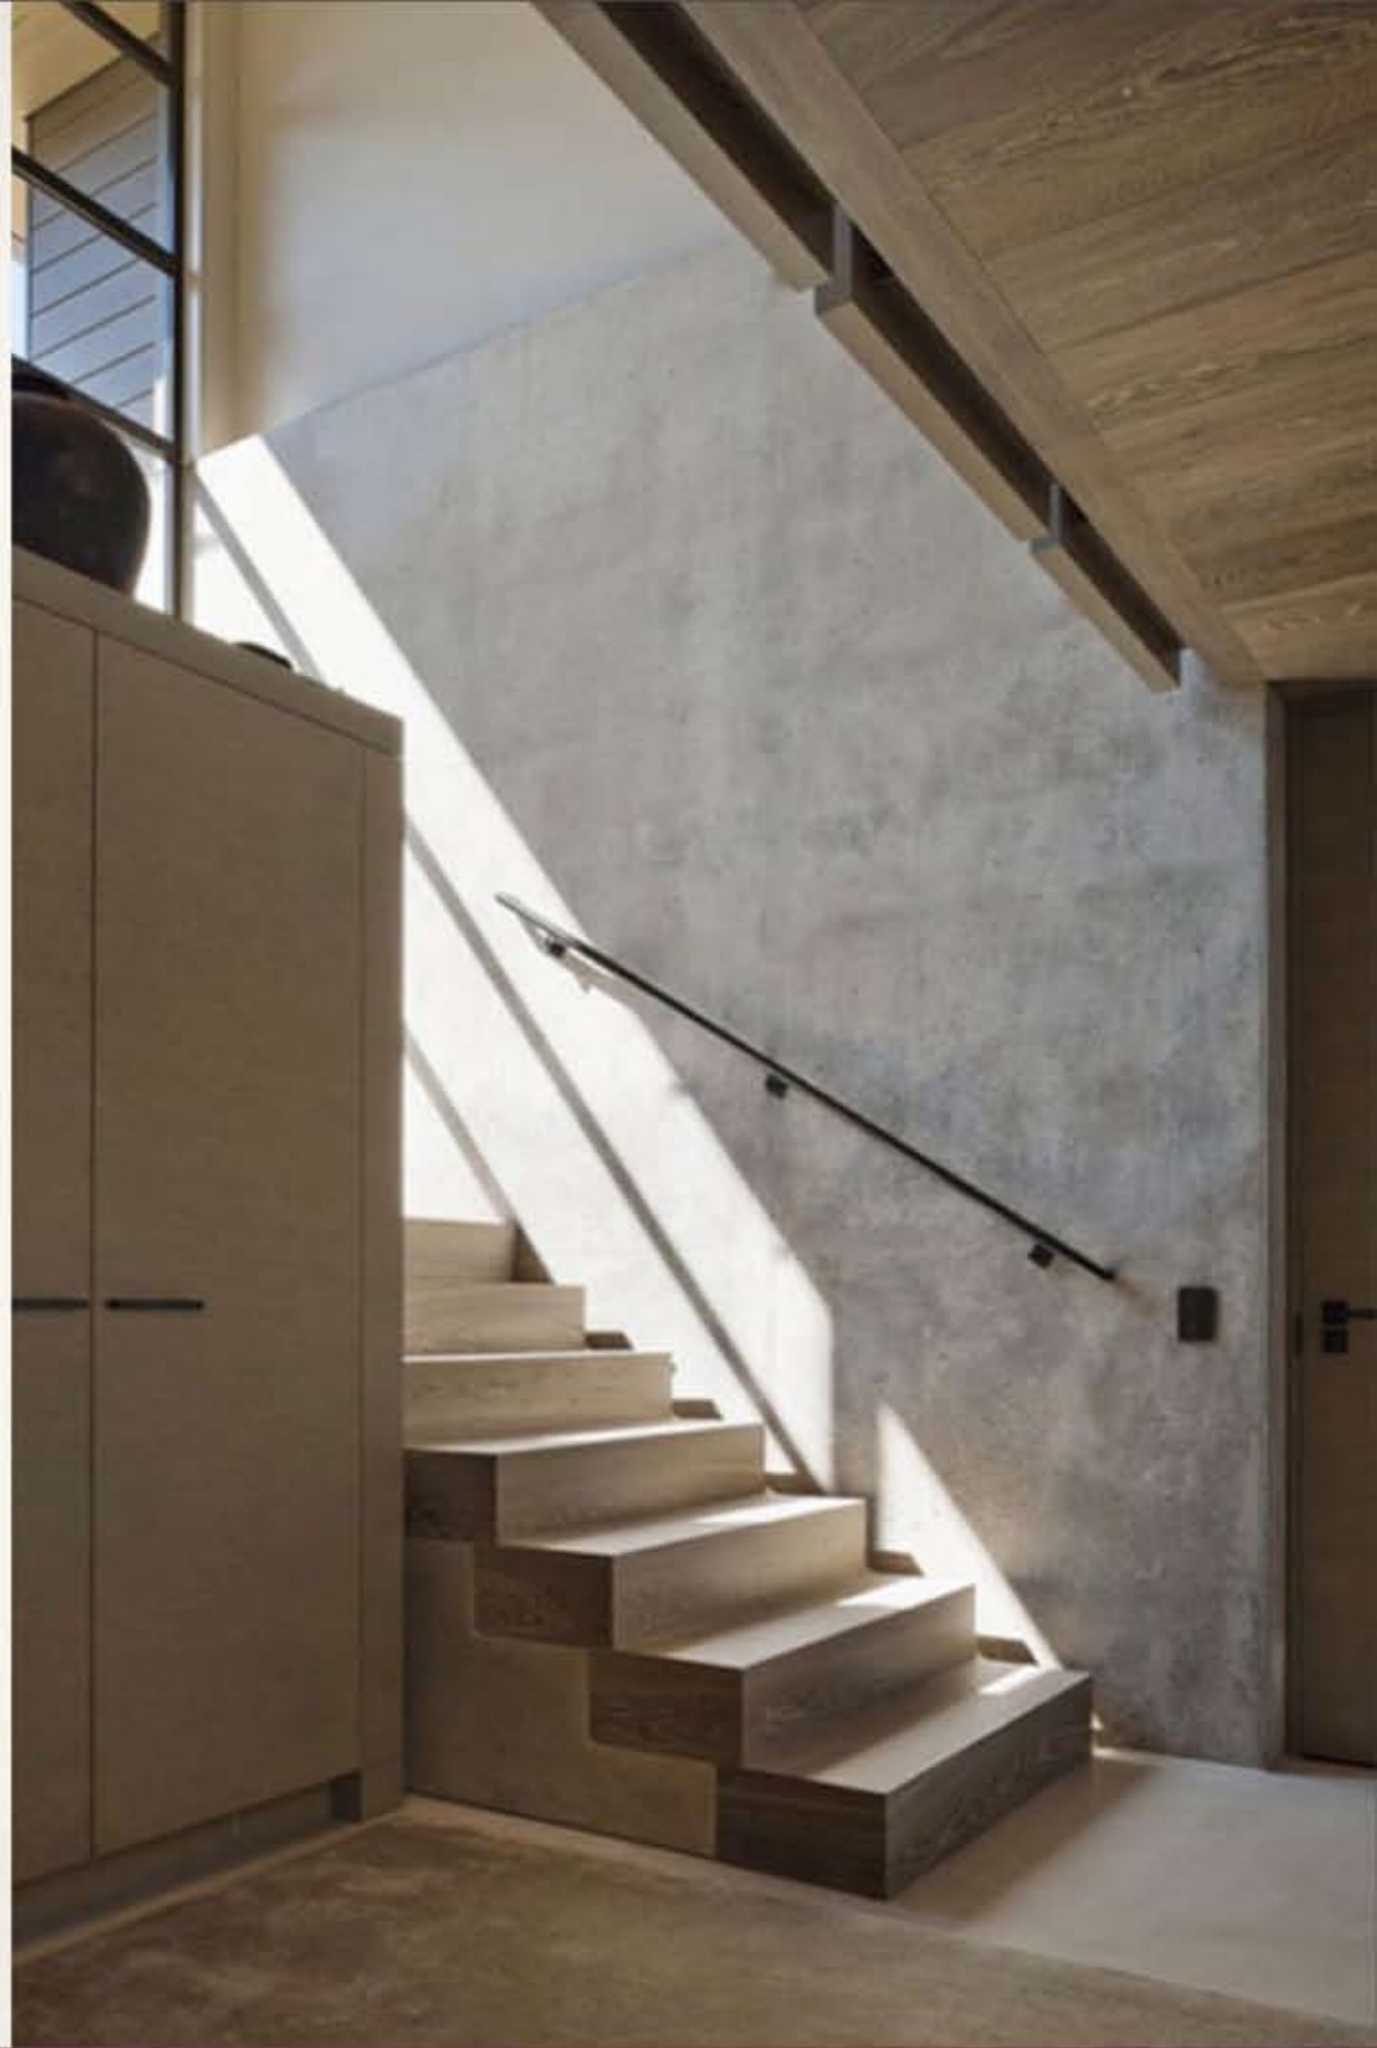







Kitchens







Exteriors













Specifications

Description	Specification
Application	Interior and Covered Exterior Wall and Ceiling
Substrate	(a) Reinforced Concrete (b) Cement Mortar Plaster
Color	Light & Dark Grey
Properties	Portland Cement Based with Polymer additive
Options	Can also be designed with grooves, dividers, studs.
Use	Commercial, Residential & Retail (Only Dry Areas)
Thickness	1mm to 4mm
Finish	Smooth, tonal variation, natural low sheen.
Curing	Seven Days
Properties	Fast Setting, Self Drying, Excellent Adhesion to many surfaces

Product displayed at:

Hydrobaths Ramco Marketing Pvt. Ltd.

86, IDC, Mehrauli Road, Gurgaon (Haryana) Ph: +91-124-4945050

Email-id: smartboard@hydrobaths.net

For Further information please visit www.hydrobaths.net